

CP502537: Thin Cell

Technical Datasheet



Technical Specifications

Part No	CP502537	
Cell Type	Primary, non-rechargeable	
Chemistry	Lithium Manganese Dioxide	
Voltage Range	1.5V to 3.3V	
Nominal Voltage	3.0V	
Typical Capacity¹	1200mAh	
Max. Continuous Discharge	150mA	
Max. Pulse Discharge	Up to 300mA (life and temperature dependent)	
Energy Rating	3600mWh	
Energy Density		
Gravimetric	378Wh/kg	
Volumetric	1252Wh/L	
Weight	9.5g	
Operating Temperature	-20°C to +60°C	
Storage Temperature²	-40°C to +60°C	
Exterior/Housing	Laminated aluminium foil	
Terminals/Connector	Ni-stainless steel tabs (Ni-Ni optional)	
Size (maximums)	Length:	43.0mm
	Width:	25.0mm
	Height:	5.0mm
Certifications	UL 1642 UN 38.3	
Safety	AL/MSDS-RD-004	
Transportation³	Dangerous Goods Class 9: Miscellaneous UN3090 Air shipment: Packing Instruction 968, Section IB	
Quality Assurance	Ultralife manufacturing facilities are ISO 9001:2008 and ISO 14001:2004 registered. Its products are listed under the Component Recognition Program of Underwriters Laboratories (UL) and have passed UN transportation testing, which is required for international transportation of all lithium batteries.	

Features

- Flat discharge curve
- High power and higher energy for the whole battery life
- Long shelf life
- Low self-discharge rate (less than 2% after 1 year of storage at +20°C)
- High energy density
- Wide operating temperature range
- Lightweight



Applications

- “Smart” security cards
- Asset tracking tags
- Bank theft tracking systems
- Electronics record tracking systems
- Medical devices
- RFID

Notes

1. Discharged using 10mA to 1.5V @ +23°C.
2. For a >5 years life, storage should not exceed +30°C.
3. For shipments by air that are no more than 8 cells and 1 package, this cell is Excepted Dangerous Goods and can be shipped under Packing Instruction 968, Section II.

Dimensions

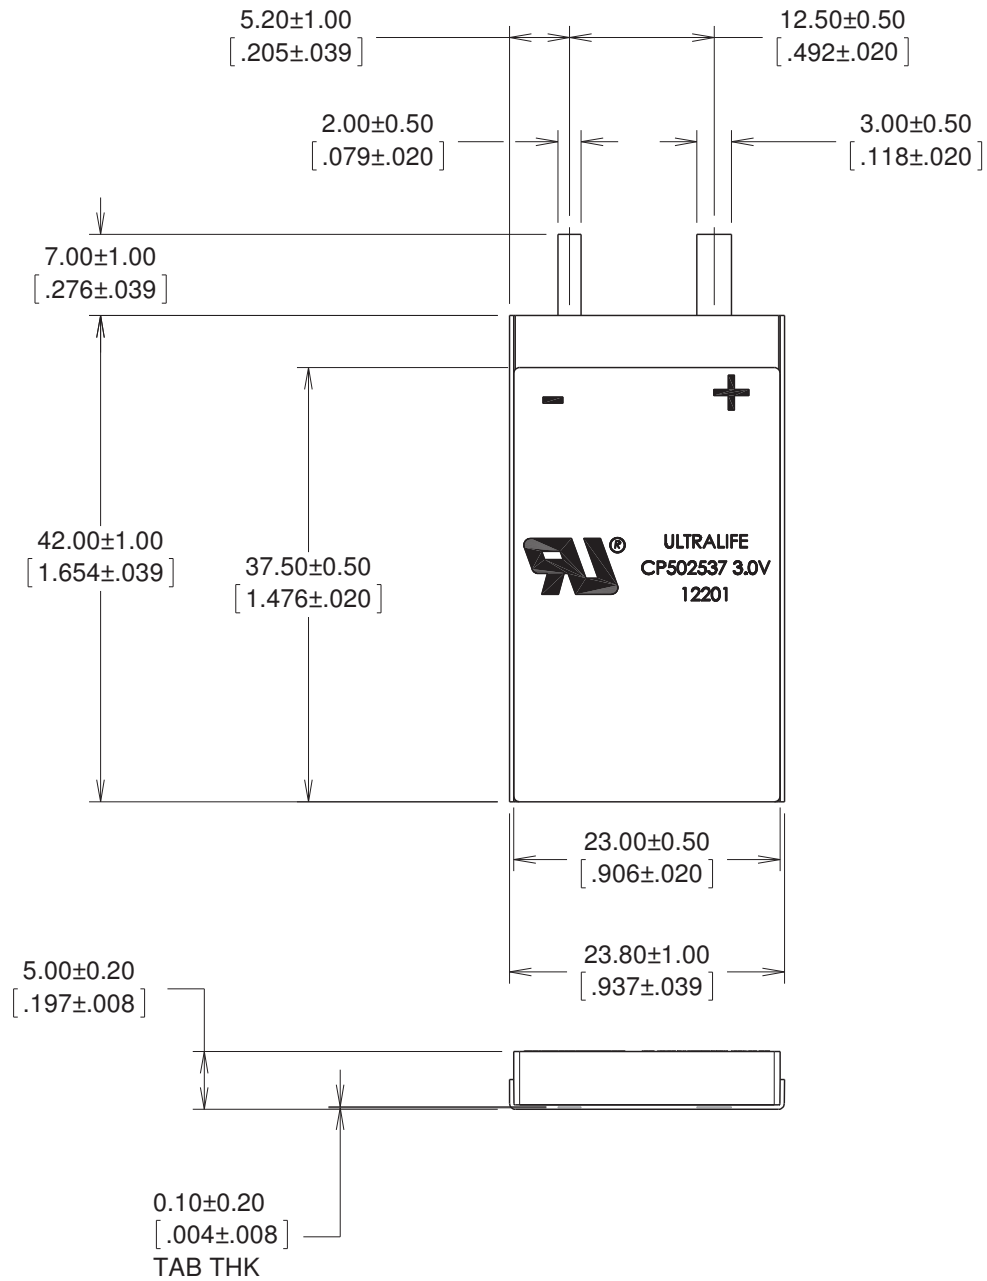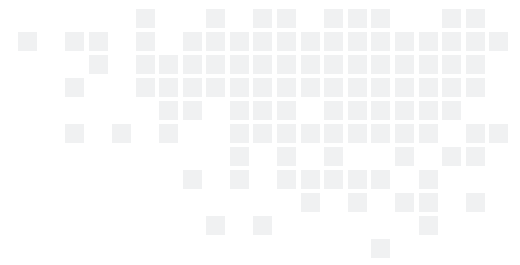

CP502537

Newark, New York | +1 315-332-7100 | Fax: +1 315-331-7800

©2018 Ultralife Corporation • www.ultralifecorp.com • All information is subject to change without notice.

The information contained herein is for reference only and does not constitute a warranty of performance. • 30 JAN 18 UBM-0058 Rev: A

Performance Graphs

